


## 9. Setting your system back up

Dry off the leak detector and check that the tile shows as “No leak detected”:

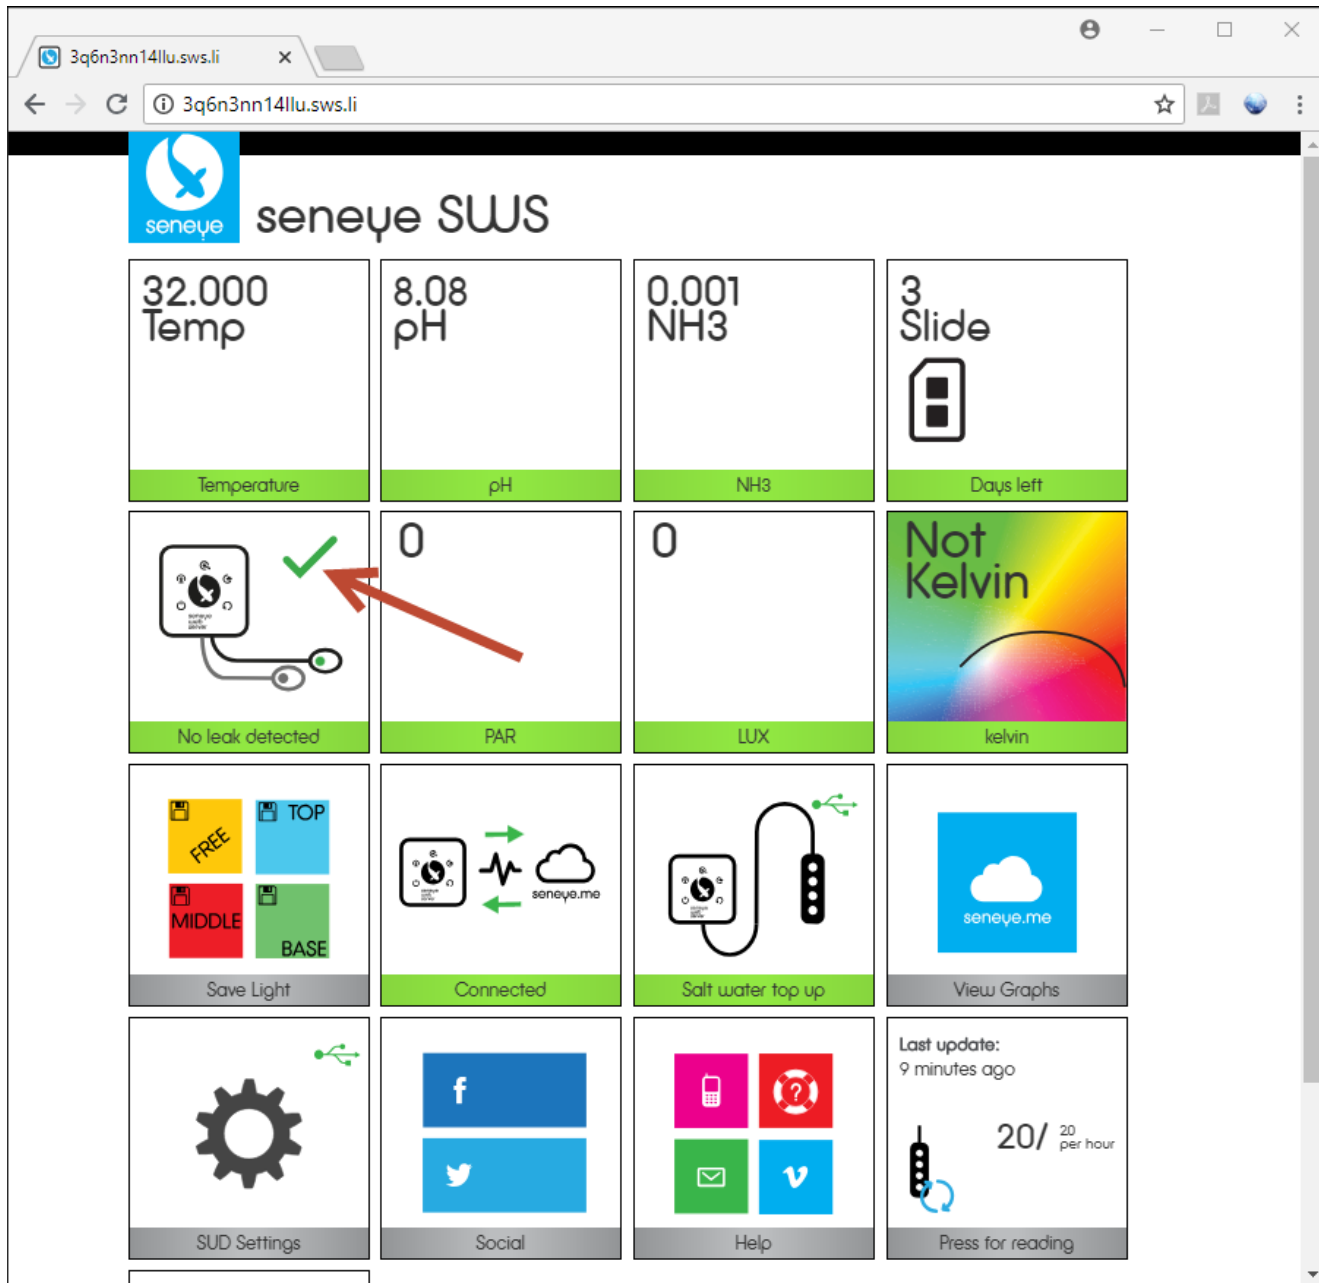

When a leak is detected, please clean off the water as soon as possible from the detector. Prolonged exposure to water can cause the surface to mark.

Your Leak Detector is now ready for use! Set your SWS and Seneye sensor up as before, and leave your Leak Detector in the area where moisture is the most likely to gather in the event of a leak.

We hope you enjoy your Leak Detector. If you have any questions or anything to report throughout the beta phase, please email [support@seneye.com](mailto:support@seneye.com).

Thank you for being a beta tester!

If you would like to find out more about the best position for your Leak Detector, please click the 'Next' button below:

[Back](#)

[Next](#)